

# Floor Mounted Bath Spout Brushed Brass BF94BB



Congratulations on your purchase of this high quality product from Foreno Tapware.

Please read the following before installation and retain (along with your receipt) for future reference.

## **TECHNICAL SPECIFICATIONS**

# Suitable for Mains Pressure only

Minimum Pressure = 150kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

# **CONFIGURATION**

Mains Pressure systems Install as supplied.

Unequal Low systems This product is not suitable for this type of water pressure. Equal Low systems This product is not suitable for this type of water pressure.

#### **INSTALLATION**


FOR PRESSURES EXCEEDING 500KPA INSTALL A PRESSURE REDUCING VALVE.

THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE,

AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY.

- Screw the brass base plate onto the floor using the screws provided.
- Attach the cover plate to the bath spout.
- screw the spout into the base plate.
- Apply sealant between brass base plate and the spout joint.
- Push the cover plate down to cover the base plate.
- Turn on water supply.
- Check for leaks.

Note for Plumber: Do not pressure test this mixer under static pressure.

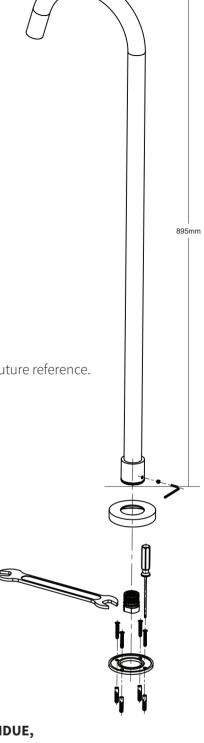

ATTACH PROOF OF PURCHASE HERE

## **WARRANTY**

## PLEASE CALL US BEFORE REMOVING TAPWARE OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

#### CARE AND MAINTENANCE

# SHOULD NOT BE CLEANED WITH ASTRINGENT, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS





