

ESPREE FLO Slide Shower **Chrome EF04**

Congratulations on your purchase of this high quality product from Foreno Tapware. Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 35kPa Maximum operating Pressure = 500kPa* (As per NZ Building Code AS/NZ 3500.1) Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Install the flow restrictor as shown in the diagram below.

Unequal Low Systems Install as supplied.

Equal Low systems Install as supplied.

CONTENTS

- Wall brackets
- Fixing kit
- Glide bar with adjuster/holder
- 1.5m supply hose
- Supply elbow
- Shower handpiece
- Flow restrictor for Mains Pressure installation



Shower Elbow

(O-ring side)

Washer

Elexi Hose

Flow Regulator

8L/min Flow Regulator


Mains Pressure installation only:

Insert the flow regulator with the O ring facing away from the hose (as shown). This will comply with the WELS rating.



*FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY.

CAUTION: If using your own screws to install the wall brackets, DO NOT use counter sunk type screws as this will void the warranty.

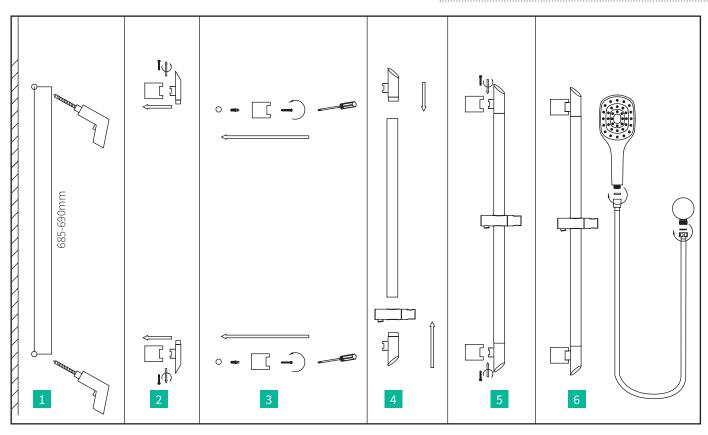

- 1. Measure and mark hole position with pencil Drill mounting holes approx 685-690mm centres.
- 2. Unscrew the swivel rail ends from the wall bracket and retain the screws.
- 3. Push wall plugs into holes. Place wall bracket over top wall plug and fix in position with screw. Repeat for bottom bracket.
- 4. Insert slider or handshower hook onto the rail. Attach the swivel rail ends onto the rail.
- 5. Place the rail onto the wall bracket and screw into place.
- 6. Attach hose to elbow and handpiece then insert the handpiece into holder.

WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

SHOULD NOT BE CLEANED WITH ACIDIC, CAUSTIC/ALKALINE, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

See FORENO. website for full care instructions: www.foreno.co.nz/tapware-care-instructions/

