


Equaliser Basin Mixer **EQMB3**



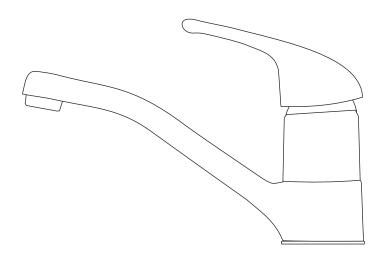

Congratulations on your purchase of this high quality product from Foreno Tapware. Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 17kPa Maximum operating Pressure = 500kPa Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems	Remove the valve insert from the valve nipple and change aerator to the WELs rated one
	supplied.
Unequal Low Systems	Ensure the valve nipple is attached to the cold in-feed hose (flow arrow
	aligned to the water flow).
Equal Low systems	Remove the valve insert from the valve nipple.

INSTALLATION

For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.

- Position tap in 35mm hole, making sure the seal between tap and supporting surface is in place.
- Anchor to bench with fittings pack.
- Thoroughly flush all pipes to eliminate any remaining dirt and residue and install inline filters (excludes some models check product label).
- Connect supply hoses to plumbing connections. NB: When fitting the Hot side copper supply tube, please ensure the O ring beds into the body recess. Maximum bend for flexible hose is 35mm radius. Do not stretch, crush or twist hoses. Do not swage hose ends.
- Turn on mains supply. Check for leaks.

Trouble Shooting

ATTACH PROOF OF PURCHASE HERE

- 1. Hot flow is over-riding hot pressure Regulator nipple has not be attached to cold supply hose
- 2. Flow is slower than 5litres/min on hot supply side Aerator is partially blocked clean
- 3. Mixer does not shut off cartridge nut needs tightening or cartridge damaged by dirty water.

Plumbers Note: Do not pressure test this mixer under static pressure.

WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners. A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

Master

Gasfitters

Master

Drainlayers

Master

Plumbers[.]