


# Equaliser Sink Mixer **EQMX1.1**



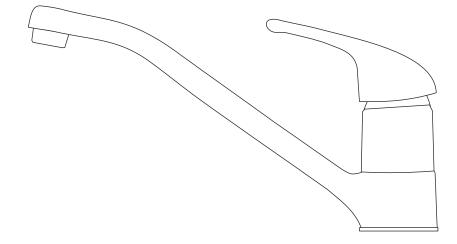

Congratulations on your purchase of this high quality product from Foreno Tapware.

Please read the following before installation and retain (along with your receipt) for future reference.

#### **TECHNICAL SPECIFICATIONS**

#### **Suitable for All Pressures**

Minimum Pressure = 17kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

## **CONFIGURATION**

Mains Pressure systems Remove the valve insert from the valve nipple and change aerator to the WELs rated one.

Unequal Low Systems Ensure the valve nipple is attached to the cold inlet hose (arrow aligned to the water flow).

Remove the valve insert from the valve nipple.

#### **INSTALLATION**

# For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.

- Position tap in 35mm hole, making sure the seal between tap and supporting surface is in place.
- Anchor to bench with fittings pack.
- Thoroughly flush all pipes to eliminate any remaining dirt and residue and install inline filters.
- Connect supply hoses to plumbing connections. NB: When fitting the hot side copper supply tube, please ensure the o-ring beds into the body recess. Maximum bend for flexible hose is 35mm radius. Do not stretch, crush or twist hoses. Do not swage hose ends.
- Turn on mains supply. Check for leaks.

#### **TROUBLE SHOOTING**

- 1. Is the hot flow over-riding the hot pressure? The regulator nipple has not be attached to cold supply hose.
- 2. Is the flow slower than 5L/min on the hot supply side? The aerator is partially blocked, clean it.
- 3. Is the mixer not shutting off? The cartridge nut needs tightening or the cartridge damaged by dirty water.

ATTACH PROOF OF PURCHASE HERE

#### **WARRANTY**

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

## CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners. A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

ROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYER:





