


# Espree Basin Tap Set **ET220**



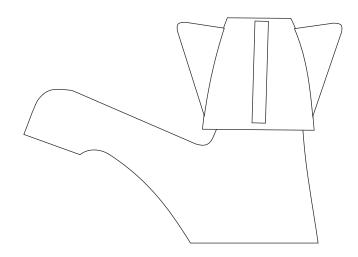

Congratulations on your purchase of this high quality product from Foreno Tapware.

Please read the following before installation and retain (along with your receipt) for future reference.

#### **TECHNICAL SPECIFICATIONS**

#### **Suitable for All Pressures**

Minimum Pressure = 17kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

## **CONFIGURATION**

 $\label{thm:local_problem} \mbox{Mains Pressure systems Insert the valve from the mains pressure pack.}$ 


Unequal Low Systems Install as supplied.

Equal Low systems Install as supplied.

## **INSTALLATION**

For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.

- Drill a minimum 25mm hole within the vanity top.
- Remove back-nut and basin spacer.
- Mount tap with O-ring in base groove.
- Fit basin spacer underneath and tighten on back-nut.
- Connect to plumbing.
- Turn on water supply. Check for leaks

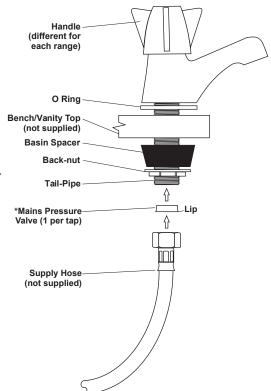

ATTACH PROOF OF PURCHASE HERE

### **WARRANTY**

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

## CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners. A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

ROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS





