
FORENO.

TAPWARE MADE FOR NEW ZEALAND since 1969

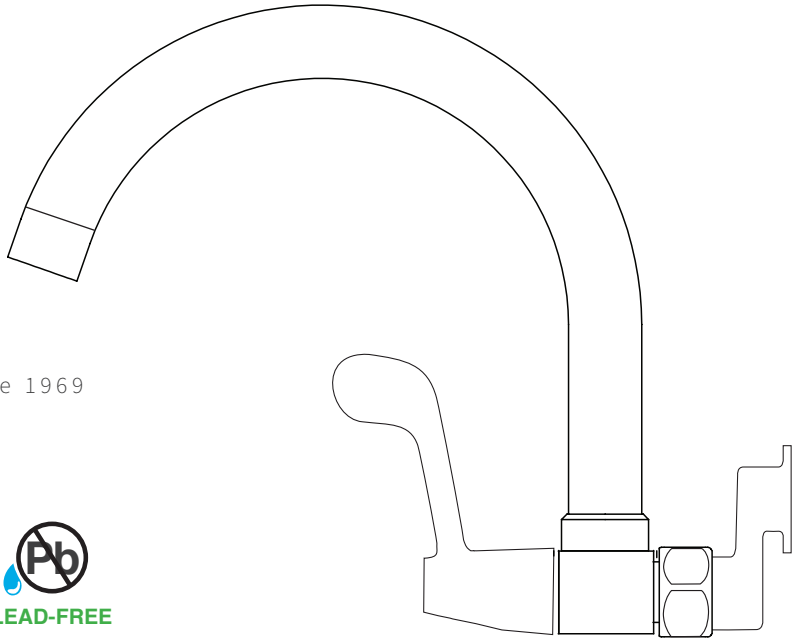

# EZYFLO

## Sink Faucet

## EZF1

LEAD-FREE

Congratulations on your purchase of this high quality product from Foreno Tapware.
Please read the following before installation and retain (along with your receipt) for future reference.


### TECHNICAL SPECIFICATIONS

**Suitable for All Pressures**
Minimum Pressure = 17kPa
Maximum operating Pressure = 500kPa*
(As per NZ Building Code AS/NZ 3500.1)
Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

### CONFIGURATION

| | |
|---|---|
| Mains Pressure systems | Remove the aerator insert from the housing and change to the mains pressure insert supplied. See diagram. |
| Unequal Low Systems | Install as supplied. |
| Equal Low systems | Install as supplied. |

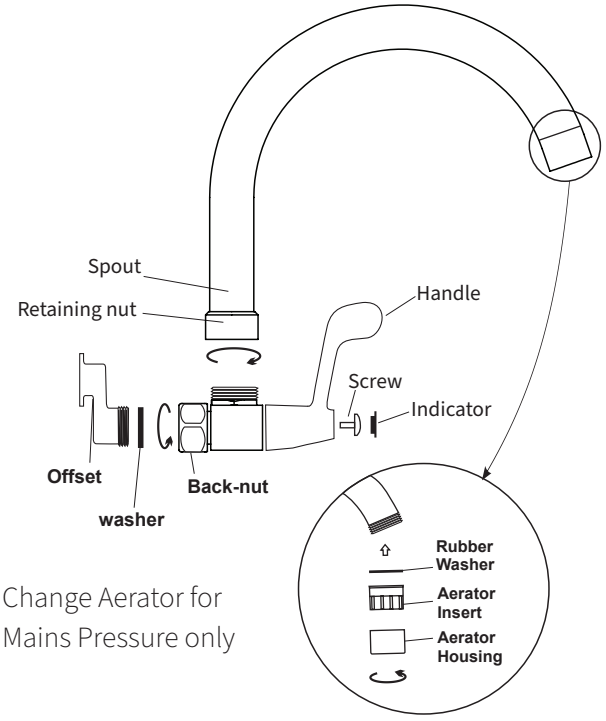


Change Aerator for Mains Pressure only

### INSTALLATION

***FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY. TO BE INSTALLED AS PER THE REQUIREMENTS WITH AS/NZS 3500.**

- Fit offsets to wall mounted wing backs and adjust width to match the faucet body backnuts. NB: It is essential to apply either Teflon sealing tape or graphite & hemp around the screwed tube prior to installation.
- Fit mounting washers to the faucet body backnuts and hand-tighten back-nuts on to offsets. NB: Do not over-tighten. Only a quarter-turn with a wrench is required, cover nuts with cloth to avoid scratching. No thread tape is required on the external offset thread within the coupling.

ATTACH PROOF OF PURCHASE HERE

- Fit the spout. Handtighten the spout coupling nut on to the Faucet body outlet thread. Tweak a further quarter turn with adjustable spanner, covering the chrome surface with cloth to prevent scratching.
- Attach handles by fitting onto spindles, ensuring each handle is aligned to be pointing in the desired direction.
- Fit and tighten screw firmly to hold handle in place and push hot/red and cold/blue indicators into place.
- Turn on water supply. Check for leaks.

## WARRANTY

**PLEASE CALL US BEFORE REMOVING TAPWARE OR UNDERTAKING ANY REPAIR WORK.**

Please refer to our website for warranty information: **www.foreno.co.nz/warranty**

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

## CARE AND MAINTENANCE

**SHOULD NOT BE CLEANED WITH ACIDIC, CAUSTIC/ALKALINE, ABRASIVE OR CITRIC CLEANERS.**

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

See FORENO. website for full care instructions: **www.foreno.co.nz/tapware-care-instructions/**

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

Master Plumbers Representing Excellence = Master Gasfitters Representing Excellence = Master Drainlayers Representing Excellence