




FORENO.

Shower Mixer with Diverter FDC7

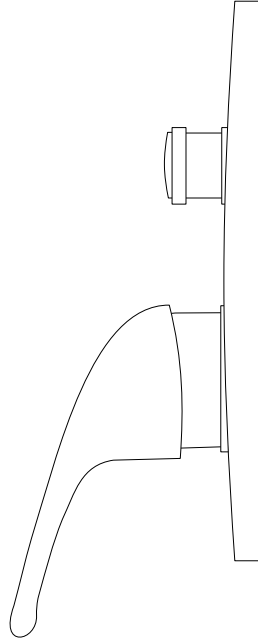

9 421009 511426

Congratulations on your purchase of this high quality product from Foreno Tapware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for Mains Pressure only

Minimum Pressure = 150kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low Systems Not suitable.

Equal Low systems Not suitable.

INSTALLATION

For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.

- Note the red (or 'H') marked port is for the hot supply line which is to the left side (see diagram).
- In-line filters are recommended, particularly on the cold water supply line, to ensure cartridge longevity. Failure to install such a filter may void the 10 Year warranty. Note: In the unlikely failure of this product, please contact your supplier before removal of the product. Failure to do so may void the warranty.
- Shower mixers must be water tested with the outlet open, to prevent damage to cartridge seals due to back pressure. Any water seepage ex-the cartridge cavity opening can be stopped by re-tightening the large brass retaining nut.

ATTACH PROOF OF PURCHASE HERE

WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners.

A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

