





FORENO.

Loop Lever Sink Mixer FMX2.1

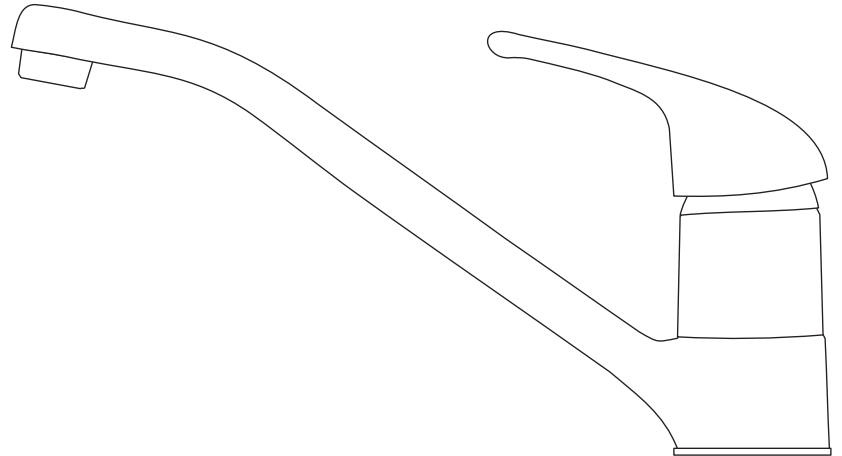

9 421027 593961

Congratulations on your purchase of this high quality product from Foreno Tapware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 35kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Remove the valve insert from the valve nipple and change aerator to the WELS rated one supplied.

Unequal Low Systems Ensure the valve nipple is attached to the cold in-feed hose (flow arrow aligned to the water flow).

Equal Low systems Remove the valve insert from the valve nipple (a minimum of 35kPa is required).

INSTALLATION

For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.

- Position tap in 35mm hole, making sure the seal between tap and supporting surface is in place.
- Connect supply hoses to plumbing connections. NB: When fitting the hot supply flexi-hose (bigger bore hose with pipe extension), please ensure the o-ring on the spigot end beds into the body recess (i.e. the shoulder face of the tube extension, tightens to the base face).
- Anchor to the bench with fittings pack.
- Remember to thoroughly flush all supply lines to eliminate any remaining dirt and residue and install inline filters. **NB: Maximum bend for flexible hose is 35mm radius. Do not stretch, crush or twist hoses. Do not swage hose ends.**
- Turn on water supply. Check for leaks.

ATTACH PROOF OF PURCHASE HERE

WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners. A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

