




FORENO.

Filter Sink Mixer with Filter Kit **FMXFK**

Filter Kit reorder code: **FORPT111**

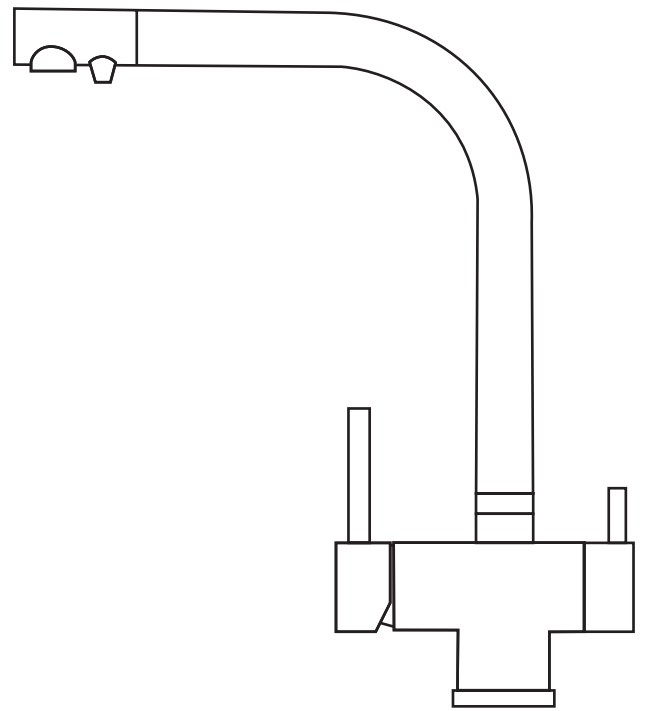

9 421027 593565

Congratulations on your purchase of this high quality product from Foreno Tapware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for Mains Pressure only

Minimum Pressure = 150kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

Note: The Filter Tap is compatible in New Zealand with the Sapphire UN01 Universal Carbon Filter.

CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low systems This product is not suitable for this type of water pressure.

Equal Low systems This product is not suitable for this type of water pressure.

This product is not suitable for use with gravity-fed systems.

CONTENTS

- Mixer body
- Fittings pack
- 2 inlet hoses
- Third coupling for the inline filter (inline filter not included)
- Adapter connection (for cartridge filter connection hose)
- Filter kit (installation instructions included separately)

ATTACH PROOF OF PURCHASE HERE

INSTALLATION

For pressures exceeding 500kPa, install a pressure limiting valve. Failure to do so may void the warranty.

Installation to comply with Section 5.4 of AS/NZS 3500 Standard with regard to Isolating stop cock use. As per AS/NZS 3500.1:2300 clause 3.3.4, the maximum operating pressure at any outlet, other than a fire service outlet, within a building does not exceed 500kpa.

Before installation all water lines must be flushed to remove any foreign material so it does not interfere with the flow regulated aerator or damage the cartridge.

The flexible connecting hoses must be fitted to isolating stop cocks.

The maximum bench thickness for this mixer is 35mm.

- Before commencing installation, turn off water supply.
- Position tap in 35mm hole, making sure the seal between tap and supporting surface is in place.
- Anchor to bench with fittings pack.
- Thoroughly flush all pipes to eliminate any remaining dirt and residue and install inline filters.
- Connect supply hoses to plumbing connections.

Minimum bend for flexible hose is 35mm radius.

Do not stretch, crush or twist hoses. Do not swage hose ends.

- Turn on water supply.
- Check for leaks.

Plumbers Note: Do not pressure test this mixer under static pressure.

WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

When cleaning your Foreno product (including chrome, stainless steel, coloured or any other surface coating) you must not use any type of astringent, abrasive or citric cleaners.

We recommend using only a soft, damp cloth and on occasion a mild soap solution. Try to avoid excessive scrubbing as this could cause damage and void your warranty.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

