

FORENO

Shower Taps FSC1HT

All Pressures

Min. Pressure 17kpa

10 Year Warranty



FORENO.



Congratulations on your purchase of this high quality product from Foreno Tapware (NZ) Ltd. Please read the following before installation and retain for future reference.

Tech Specifications

Max. Operating Temperature 65 deg. Celsius, maximum operating pressure 500kPa.


Configured for:

- Mains Pressure systems - Install as supplied.
- Unequal Low Systems - Install as supplied.
- Equal Low systems - Install as supplied.

Installation

For pressures exceeding 500kPa, install a pressure reducing valve. Failure to do so may void the warranty. See Warranty section for more information.

- Simply remove the indicator and screw.
- Remove handle.
- Remove the flange and mounting washer.
- Fit the manifold to wall recess, ensuring all brackets are secured (ie tap bodies).
- Connect inlets to plumbing with either Crox or compression fittings.
- Make sure to have 10mm thread protruding when the wall lining is installed.
- Fit in the following order:
 - Screw on the headworks
 - Screw on the flanges
 - Screw on the handles. Tighten handle using the screw and finally put on the indicator.
- Turn on water supply.
- Check for leaks

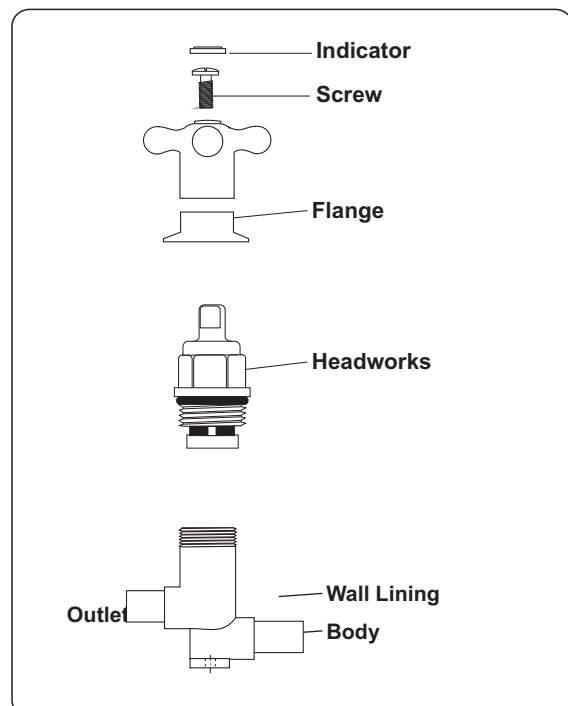

FORENO TAPWARE (NZ) LTD, 5 Hewlett St, Port Whangarei.

Tel: 64-9-470 2090

www.foreno.co.nz

Attached proof of
purchase here



Warranty

Congratulations on your purchase of this high quality product from Foreno Tapware (NZ) Ltd.

Foreno New Zealand warrants that high quality materials and workmanship have been used in the manufacture of its tapware. If the product fails due to a fault of manufacture, Foreno NZ, will at its option repair or replace the product, provided that:

- The proof of purchase is given to Foreno.
- That such defect shall be found to the Company's satisfaction to have arisen from faulty design, workmanship or materials.

The Company will not be liable due to:

- Failure to produce the original invoice, providing date of purchase;
- Damages incurred during installation;
- The installation not conforming with fitting instructions;
- Unauthorised modifications or repairs;
- Surface deterioration due to cleaning methods not in accordance with instructions.
- The following standards not being met:
 - Installation to comply with Section 5.4 of AS/NZS 3500 Standard with regard to Isolating stop cock use
 - As per AS/NZS 3500.1:2300 clause 3.3.4, the maximum operating pressure at any outlet, other than a fire service outlet, within a building does not exceed 500kPa.

The Company shall accept no responsibility for compensation towards assembly or disassembly of the fitting and shall not be liable for consequential loss or damage of any kind whatsoever to or in any way caused by the goods or their use.

Care & Maintenance

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners. A soft damp cloth is recommended for cleaning. Mild soap solution can also be used on occasion.

In the unlikely event that this product fails during its warranty period, phone 0508 FORENO customer service free line, as unauthorised removal may void the warranty.

For domestic use only.

Thank you for purchasing Foreno Tapware.

Business Partner and proud supporter of
Master Plumbers, Gasfitters and Drainlayers.

