




# FORENO.

## Fusion Bath Mixer with Spout FSN9



9 421027 591592

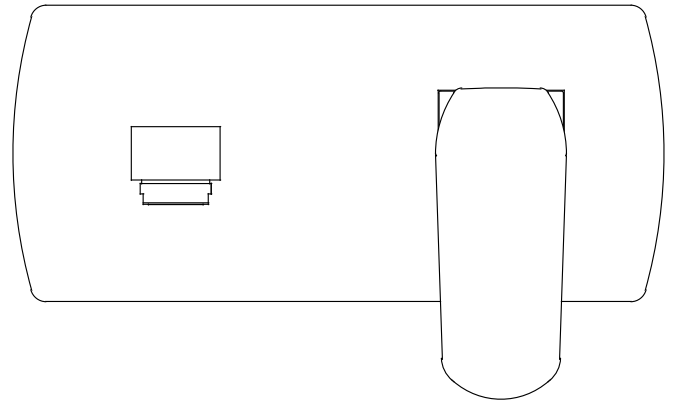

Congratulations on your purchase of this high quality product from Foreno Tapware.  
Please read the following before installation and retain (along with your receipt) for future reference.

### TECHNICAL SPECIFICATIONS

#### Suitable for Mains Pressure only

Minimum Pressure = 150kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

### CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low Systems Not suitable.

Equal Low systems Not suitable.

### INSTALLATION

**For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.**

- Before installation all water lines must be flushed to remove any foreign materials so it does not interfere with the flow regulated aerator or damage the cartridge.
- The body recess including wall lining thickness must not exceed 41.5mm to body centre, as depicted above.
- Note the protrusions at the back of the body ensure a perpendicular mounting, once screwed in place. The spout should be on the left.
- The spout fitment is the final anchor point for the body set.
- Turn on water supply. Check for leaks.

**Plumbers Note: Do not pressure test this mixer under static pressure.**

ATTACH PROOF OF PURCHASE HERE

#### WARRANTY

Please refer to our website for warranty information: [www.foreno.co.nz/warranty](http://www.foreno.co.nz/warranty)

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

#### CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners.

A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

