




FORENO.

Le Tap Sink Mixer LT140



9 421009 510689

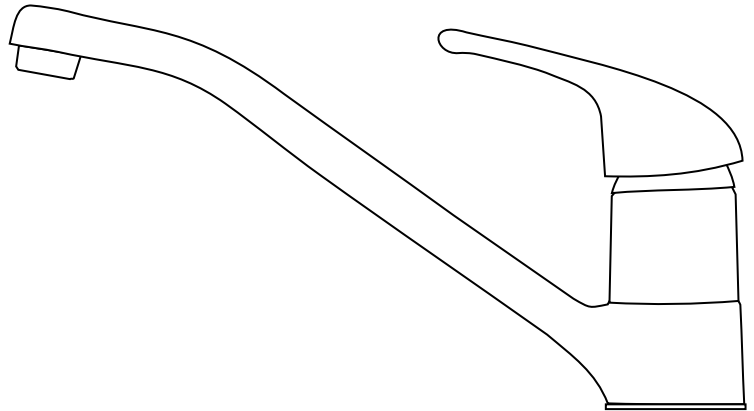

Congratulations on your purchase of this high quality product from Foreno Tapware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 35kPa

Maximum operating Pressure = 500kPa*

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Prior to installation, remove the valve insert from the valve nipple prefitted to the cold flexi hose, and change aerator to the WELs rated one supplied.

Unequal Low systems Prior to installation, ensure the valve nipple is attached to the cold in-feed hose (flow arrow aligned to the water flow).

Equal Low systems Prior to installation, remove the valve insert from the valve nipple (minimum of 40 kPa required).

INSTALLATION

***FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY.**

Position tap in 35mm hole, making sure the seal between tap and supporting surface is in place.

Anchor to bench with fittings pack.

Where applicable, it is important to ensure the base ring is hand-tight on the mixer, prior to installation.

Thoroughly flush all pipes to eliminate any remaining dirt and residue and install inline filters (excludes some models - check product label)

ATTACH PROOF OF PURCHASE HERE

Connect supply hoses to plumbing connections. NB: Maximum bend for flexible hose is 35mm radius. Do not stretch, crush or twist hoses. Do not swage hose ends.

Turn on mains supply. Check for leaks.

Plumbers Note: Do not pressure test this mixer under static pressure.

WARRANTY

PLEASE CALL US BEFORE REMOVING TAPWARE OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

SHOULD NOT BE CLEANED WITH ACIDIC, CAUSTIC/ALKALINE, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

