

FORENO.

TAPWARE MADE FOR NEW ZEALAND since 1969

LE TAP 3 Hole Basin Faucet
Chrome
LT45LFCH

LEAD-FREE






Congratulations on your purchase of this high quality product from Foreno Tapware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures
Minimum Pressure = 17kPa
Maximum operating Pressure = 500kPa*
(As per NZ Building Code AS/NZ 3500)
Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

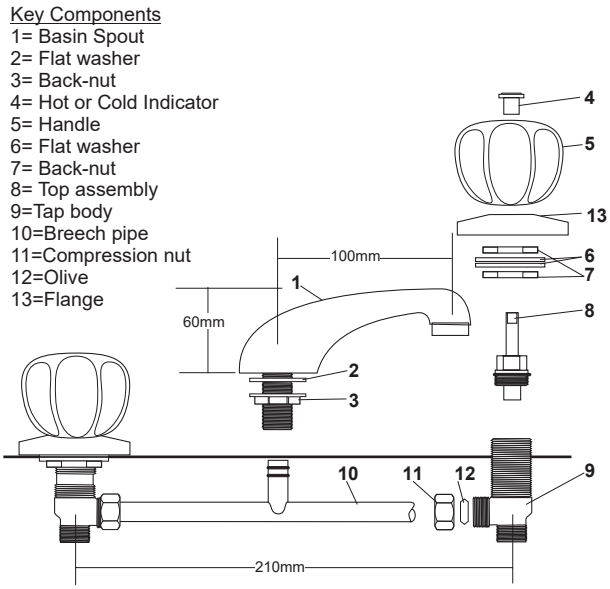

CONFIGURATION

Mains Pressure systems	Change aerator to mains pressure aerator supplied in box.
Unequal Low Systems	Install as supplied.
Equal Low systems	Install as supplied.

INSTALLATION

***FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY. TO BE INSTALLED AS PER THE REQUIREMENTS WITH AS/NZS 3500.**

In order to remove handles, the chrome disc needs to be prised out and handle retaining screw undone.

- 30mm holes are required for each tap body and 24mm hole for the spout spigot. The vanity top thickness must not exceed 38mm. The tap bodies may be spaced at between 150mm & 210mm hole centres.
- Once the holes are drilled, wind the back-nuts (see diagram, item 7) back on the tap bodies to allow for a minimum 4 thread protrusion above the vanity top.
- Cut the breech pipe (item 10) to the correct size.
- Fit the centre spout, with flat washer (item 2) on the top, flanged back-nut (item 3) underneath. Tighten.

ATTACH PROOF OF PURCHASE HERE

- Fit the breech pipe to the tap bodies and push the centre spigot into the spout tail and the tap bodies into the drilled holes.
- Place the mounting washers and flanges on the tap bodies. Tighten down.
- Tighten compression nut and olive (items 11 + 12) on either end of the breech pipe.
- Place handles on and screw on Indicator nuts (item 4).
- Turn on water supply. Check for leaks.

WARRANTY

PLEASE CALL US BEFORE REMOVING TAPWARE OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: **www.foreno.co.nz/warranty**

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

SHOULD NOT BE CLEANED WITH ACIDIC, CAUSTIC/ALKALINE, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

See FORENO. website for full care instructions: **www.foreno.co.nz/tapware-care-instructions/**

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

Master Plumbers Representing Excellence = Master Gasfitters Representing Excellence = Master Drainlayers Representing Excellence