


# NORTH Wall Mounted Basin Mixer Chrome NRT21CH



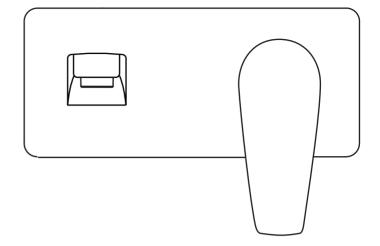

Congratulations on your purchase of this high quality product from Foreno Tapware.

Please read the following before installation and retain (along with your receipt) for future reference.

### **TECHNICAL SPECIFICATIONS**

## Suitable for All Pressures

Minimum Pressure = 35kPa
Maximum operating Pressure = 500kPa\*
Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

### **CONFIGURATION**

Mains Pressure systems Install as supplied. Do not attach the flat flow restrictor.

Unequal Low systems Attach the flat flow restrictor (with the o-ring facing out) to the cold inlet.

Equal Low systems Install as supplied. Do not attach the flat flow restrictor.

### **INSTALLATION**

# \*FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY.

- Before commencing installation turn off the water supply.
- Flush all water lines to remove any foreign materials (so it does not interfere with the flow regulated aerator or damage the cartridge), and install an inline filter if not already fitted.
- Make sure that the body recess including wall lining thickness does not exceed 41.5mm to the body centre.
- Note the protrusions at the back of the body to ensure a perpendicular mounting, once screwed into place.
- Install, making sure the spout is on the left. The spout fitment is the final anchor point for the body set.
- Turn on mains supply.
- Check for leaks.

Plumbers Note: Do not pressure test this mixer under static pressure.

ATTACH PROOF OF PURCHASE HERE

### **WARRANTY**

### PLEASE CALL US BEFORE REMOVING TAPWARE OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

### CARE AND MAINTENANCE

# SHOULD NOT BE CLEANED WITH ASTRINGENT, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.