

# Primus Multi Function Slide Shower

## PSL9



Congratulations on your purchase of this high quality product from Foreno Tapware. Please read the following before installation and retain (along with your receipt) for future reference.

#### **TECHNICAL SPECIFICATIONS**

#### Suitable for Mains Pressure only

Minimum Pressure = 150kPa Maximum operating Pressure = 500kPa Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

#### CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low Systems This product is not suitable for this type of water pressure.

Equal Low systems This product is not suitable for this type of water pressure.


#### **CONTENTS**

- Wall brackets and covers
- Fixing kit
- Glide bar with adjuster/holder
- 1.5m supply hose
- Supply elbow
- Shower handpiece
- Soap dish


#### **INSTALLATION**

See steps on the next page.

Then attach the supply elbow to the supply connection on the wall.

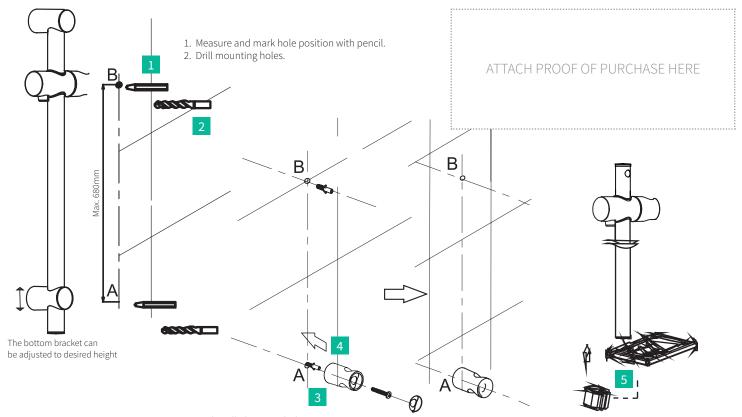

- 3. Push wall plugs into holes.
- 4. Place holder over top wall plug and fix in position with screw.
- 5. Attach soap dish to support, then slide onto the tube.

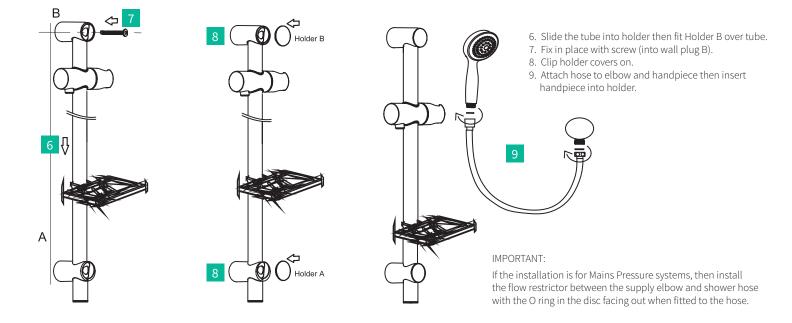

#### WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

### CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners. A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.