



FORENO.

Primus Shower Mixer PSM5



9 421009 514106

Congratulations on your purchase of this high quality product from Foreno Tapware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 35kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION


- | | |
|------------------------|---|
| Mains Pressure systems | Remove the insert from the cold side marked with a 'C'. |
| Unequal Low Systems | Install as supplied. |
| Equal Low systems | Remove the valve inserts from both inlets, prior to installation. |

NB: Only slide showers that are equipped with a large internal bore hose and open flow one function handset will work effectively with this shower mixer at low water pressures. We recommend the FSL8 MonoJet slide shower for optimum performance.

INSTALLATION

For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.

- Where back flow prevention is required, install our back flow prevention valve (part FORPT79) at the supply elbow hose connection of the handpiece.
- Shower mixers must be water tested with the outlet open to prevent damage to cartridge seals, due to back pressure.
- Any water seepage from the cartridge cavity opening can be stopped by retightening the large brass retaining nut.

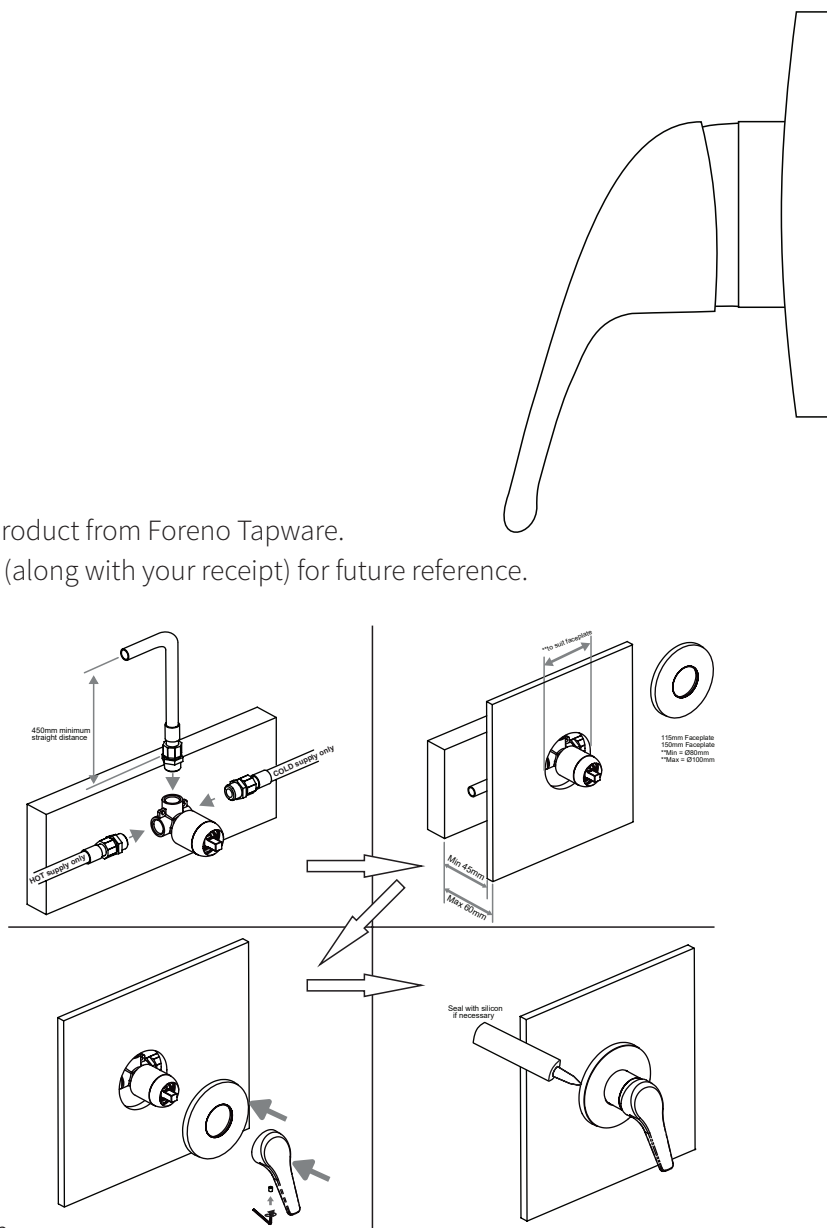

ATTACH PROOF OF PURCHASE HERE

- If you have performance issue please check there are no flow restrictors between the hose and the handpiece or the hose and the shower elbow. Remove any restrictors with rubber washers.

Plumbers Note: Do not pressure test this mixer under static pressure.

WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners.
A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

