




Purity Equaliser Minimal Stainless Steel Shower Mixer PUR033

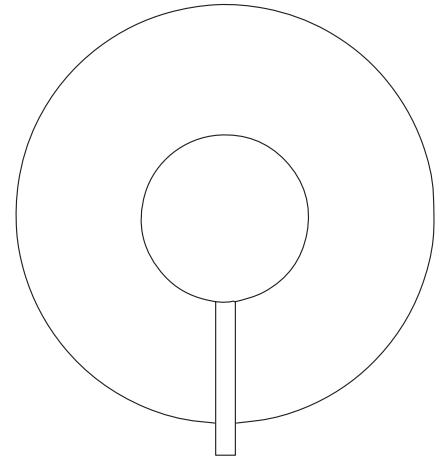

Congratulations on your purchase of this high quality product from Foreno Tapware. Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 17kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION


Mains Pressure systems Remove the valve insert from the cold inlet only.

Unequal Low Systems install needle valve to cold port (valve included in pack). When commissioning, adjust valve to achieve maximum performance.

Equal Low systems remove the valve inserts from both inlets, prior to installation.

Key Components

- 1= Face-plate
- 2= Handle
- 3= Indicator
- 4= Chrome Trim Nut
- 5= Mixer Valve Body
- 6= Bath outlet cap nut and seal

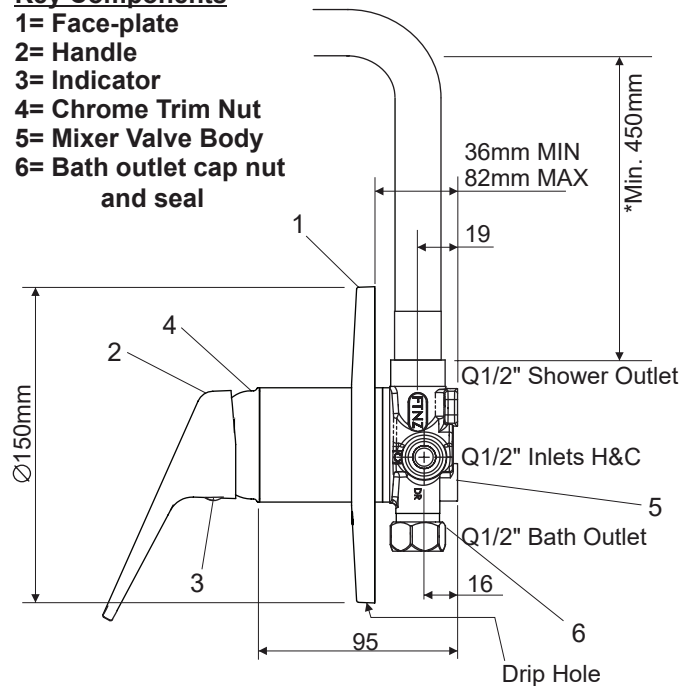

INSTALLATION

For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.

- mount body within wall cavity, noting the free-way for the face-plate adjustment. NB: If equal low or unequal low systems be sure to have minimum of 450mm straight pipe between outlet of mixer and first bend (see diagram).
- The cartridge nut has been torqued to factory settings, please do not adjust this setting as it will create leakage.
- When testing for leaks do not block off or plug outlet port. Back pressure will damage the ceramic cartridge and void warranty. Leakage from the cartridge shaft at the front of the mixer valve is an indication of this damage.
- After the wall lining has been fitted and finished push the face-plate on. NB: There is a small drip-hole along the

ATTACH PROOF OF PURCHASE HERE

side of the faceplate, this should be facing bottom to allow any water to drip out.

- Fit the handle and secure by tightening the grub screw. Place Indicator button in hole (item 3).
- An in-line filter is always recommended on the cold supply to protect ceramics and give longevity to the cartridge.
- If you have performance issue please check there are no flow restrictors between the hose and the handpiece or the hose and the shower elbow. Remove any restrictors with rubber washers.
- When selecting a hand shower to go with the Equaliser, a single function handpiece and large internal bore shower hose are recommended on low pressure installations. We recommend the Foreno MonoJet handshower or FSR1 15mm Rose.
- Turn on water supply. Check for leaks.

WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners.

A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

