




FORENO.

Primus Laundry Tap Combo PWM7

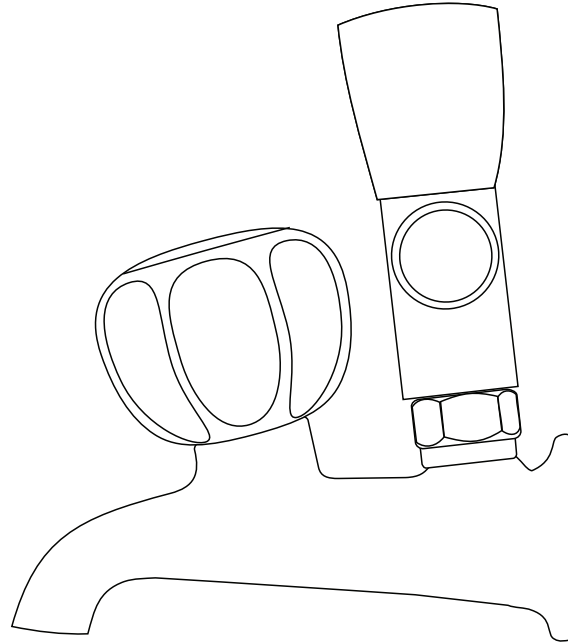

9 421009 514052

Congratulations on your purchase of this high quality product from Foreno Tapware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 17kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low Systems Install as supplied.

Equal Low systems Install as supplied.

INSTALLATION

For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.

- Turn off mains supply.
- Cut 15mm screwed tube to allow for a minimum 15mm wall protrusion and fit hot and cold tub taps. NB: It is essential to apply either Teflon sealing tape or graphite & hemp around the screwed tube prior to installation.
- When attaching the washing machine taps, ensure that the mounting washer is inserted between the coupling nut and washing machine tap inlet spigot. NB: Do not over-tighten nut. Do not rotate washing machine tap once mounting nut tightened.
- Ensure the washing machine valves are off if not connected to the appliance, when turning on mains water supply.
- Turn on water supply. Check for leaks.

ATTACH PROOF OF PURCHASE HERE

WARRANTY

Please refer to our website for warranty information: www.foreno.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners. A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

