




## X-Factor Shower Taps XFAC5



9 421009 517459

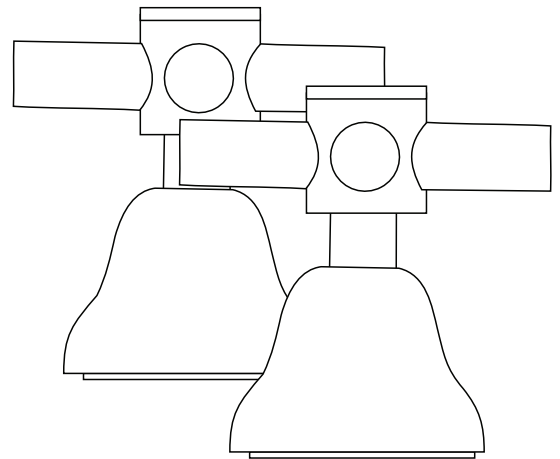

Congratulations on your purchase of this high quality product from Foreno Tapware.  
Please read the following before installation and retain (along with your receipt) for future reference.

### TECHNICAL SPECIFICATIONS

#### Suitable for All Pressures

Minimum Pressure = 17kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

### CONFIGURATION

Mains Pressure systems Install as supplied.


Unequal Low Systems Install as supplied.

Equal Low systems Install as supplied.

### INSTALLATION

**For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.**

- Simply remove the indicator and screw.
- Remove handle, then the flange and mounting washer.
- Fit the manifold to wall recess, ensuring all brackets are secured (i.e. tap bodies).
- Connect inlets to plumbing with either crox or compression fittings. NB: Make sure to have 10mm thread protruding when the wall lining is installed.
- Fit in the following order:
  - Mount flat washers and screw on the flanges.
  - Screw on the handles, tighten handle using the screw.
  - Fit the indicator.
- Turn on water supply. Check for leaks.

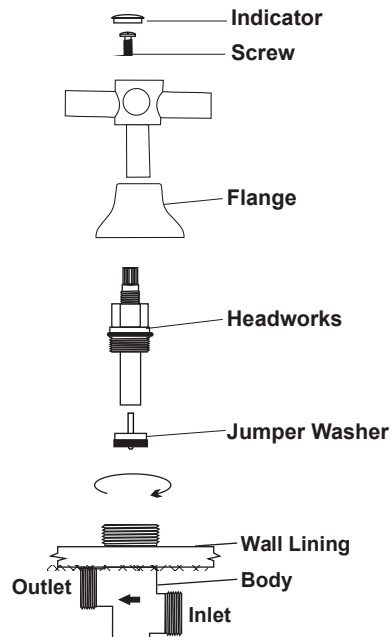

ATTACH PROOF OF PURCHASE HERE

#### WARRANTY

Please refer to our website for warranty information: [www.foreno.co.nz/warranty](http://www.foreno.co.nz/warranty)

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

#### CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners. A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

